

MAXI QUILT WALL HANGER

COMMITMENT TO EXCELLENCE

We want you to be pleased with our products and our service, so if you need verbal assistance with the assembly or hanging of any of our quilt display products or if you have any suggestions on what we can do to improve our service to you, please feel free to contact us in any way listed here:

By phone at **(937) 506-0032**, by e-mail at **info@quiltdisplayproducts.com** or by visiting our website at **www.quiltdisplayproducts.com**.

EXAMINE THE PACKAGE CONTENTS

Carefully examine the contents of this package. If you suspect that there is damage or missing parts, contact Quilt Display Products at (937) 506-0032 between the hours of 8:00 AM and 5:00 PM Eastern Standard Time for directions on how to proceed. Please keep the original package and packing material in the event that you need to return the product to us.

THE CONTENTS OF THE BOX

Make note of the existence of the following contents.

1. One Quilt Wall Hanger Left Front
2. One Quilt Wall Hanger Right Front
3. One Quilt Wall Hanger Back Center
4. Two Quilt Wall Hanger Back Shorts
5. One Spanner
6. One small bag containing:
 - a. Two Metal Wall Anchors (E-Z Ancor™)
 - b. Two Phillips Head Screws
 - c. Two Wooden Supports with Holes
 - d. Four Short Phillips Head Bolts
 - e. Eight Long Phillips Head Bolts

HANGING PROCEDURE

Begin with Step 1 on the next page and follow the directions exactly. All of our wall hangers are designed to hold about 100 lbs, so they should be secure enough for even your largest quilt. When you have finished hanging your quilt wall hanger, stand back and enjoy your accomplishment!

Step 1


Lay the Left Front and Right Front parts together on a nice flat and smooth surface as shown below. These parts that will be joined at the center by the Spanner and Four Small Bolts.

Loosely install all Four Small Bolts through the Spanner and into both the Right and Left Front Parts. Adjust the butt joint as tightly and squarely together as possible and then tighten the bolts with a Phillips Screwdriver.

Insure that the Left and Right Front Parts are in a straight line and the joint between them is closed as tightly as possible.

WARNING

Do not lift this assembly once it is bolted together. The Spanner may break or the bolts may be pulled out. The Wall Hanger will not have its full strength until fully assembled.

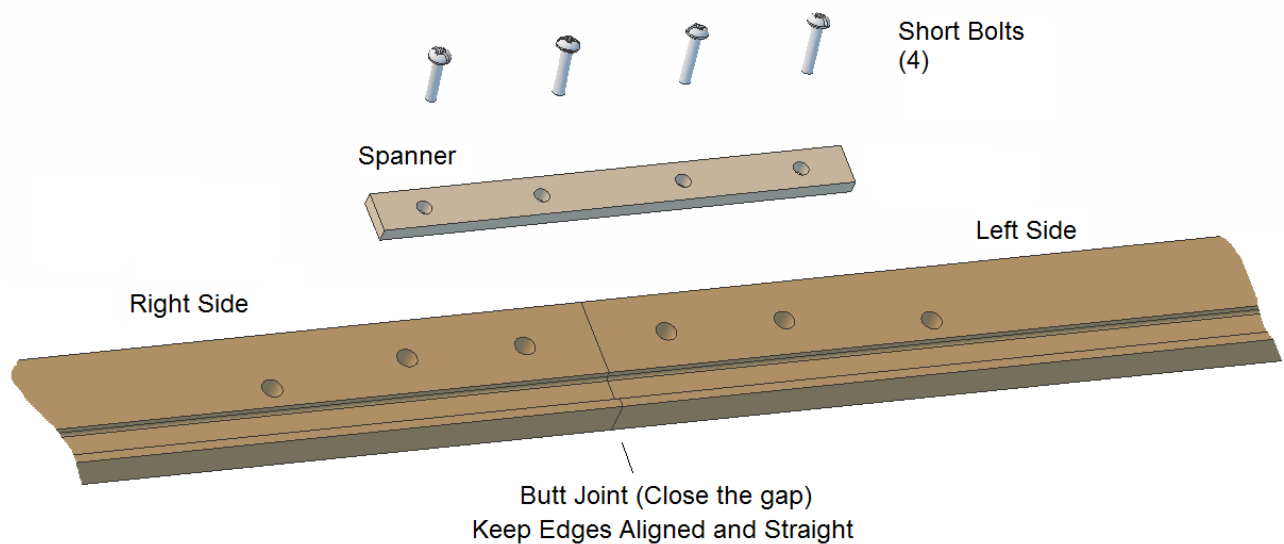


Step 2

Keeping the assembly from Step 1 in the same position, lay the binding of the quilt you want to display in the groove. You should be looking at the back of the quilt at this point.

Center your quilt in the wall hanger and make sure no part of it interferes with the bolt inserts.

Place the Back Center over the top of the front, trapping your quilt's binding between the two parts. Be sure that the wedge is towards the top as shown below.

Insert four Long Phillips Head Bolts through the Back Center and into the front and tighten them just enough to securely clamp your quilt in place. Use your hands to hold the front and back together, gripping both edges to keep the top and bottom aligned while you tighten the bolts.

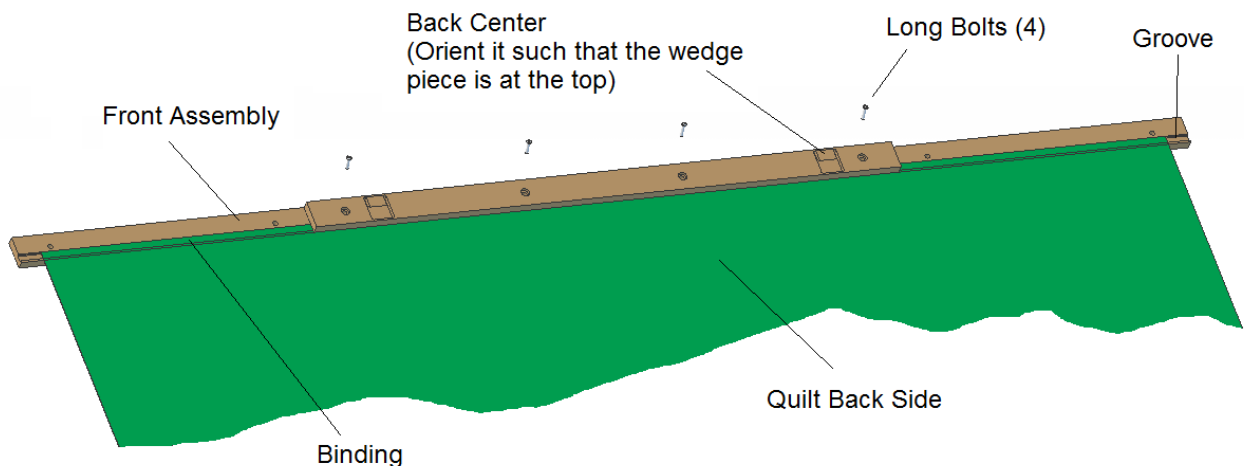

Step 3

Install the two remaining Back Shorts on either end of the Back Center using two Long Phillips Head Bolts each. Adjust your quilt so that it is tight from the Back Center towards the edge of the front assembly while you are tightening the bolts.

There will be a small gap between these shorts and the back center to allow for dimensional tolerances, so seeing a small gap is OK.


Loosen, adjust the quilt, and re-tighten as many of the 8 bolts as necessary to clamp your quilt securely in place without any sags or pinches.

At this point, your wall hanger will be good and solid and can be hung on the wall according to step 4.

Step 4

Mark two locations on the wall at the same height "H" from the ceiling where you want to mount your wall hanger. The distance "D" between these marks needs to be the same as the distance "D" between the centers of the mounting features on the back of your wall hanger.

In all cases, there will only be two hanging features.

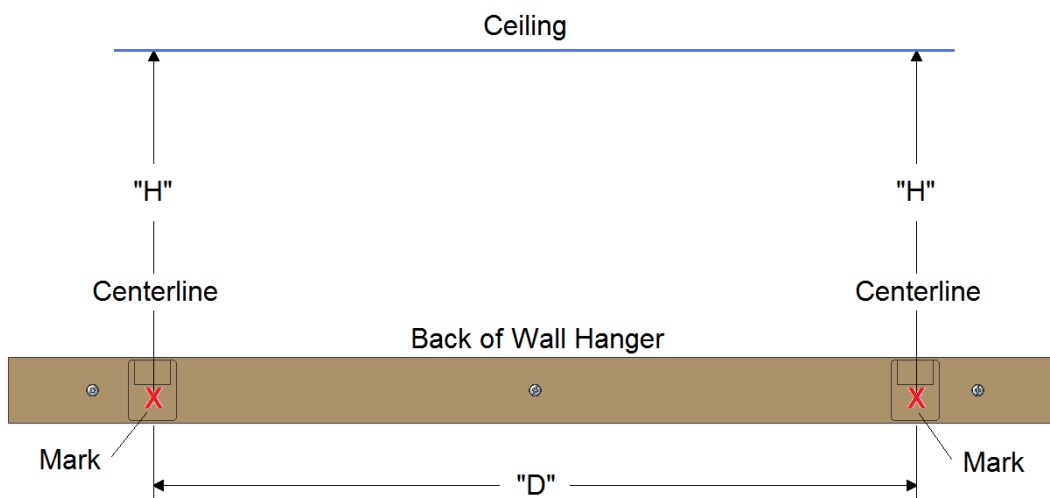

Step 5

Use a Phillips screwdriver to insert an E-Z Anchor™ at each marked location on the wall by gently pushing and turning in a clockwise direction. Be sure after tightening, that the surface of the E-Z Anchor™ is flush with the wall.



E-Z Anchor™ and Phillips Screwdriver


If you are installing the E-Z Anchor™ into a location on your wall that has a stud behind it, you may need to apply more pressure with the screwdriver to insert it. The E-Z Anchor™ is designed to be installed into drywall, or drywall backed by a wooden stud. If this doesn't work for you, remove the E-Z Anchor™ and drill a 1/8" hole into the stud, and then reinsert the E-Z Anchor™.

Note:

If your wall is not made of drywall, you will need to purchase fasteners recommended for your type of wall from a local hardware store and install them according to the manufacturer's suggestions. You will still need to screw the wooden support to your wall.

Step 6

Use the screws provided to attach a wooden support to each E-Z Anchor™. Position the wooden support such that the sharp edge is pointing toward the ceiling and away from the wall. The side with the recessed hole is the one through which the screw is inserted. Be sure the sharp edge is parallel with the ceiling when tightening the screw.

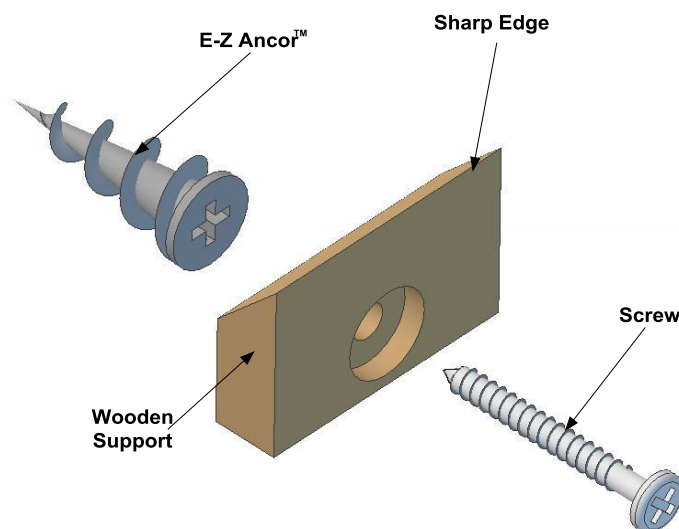

Step 7

Place your wall hanger on the two wooden supports you attached to your wall earlier, by lowering it onto them so that the two beveled surfaces interlock providing a secure connection.

Note: For very long hangers and/or heavy quilts, you may need to solicit the help of a second set of hands to put your hanger and quilt on the wall.

